
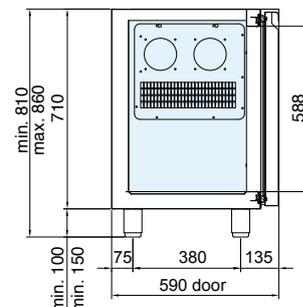


mod. COU1286TN | cod. 06622040

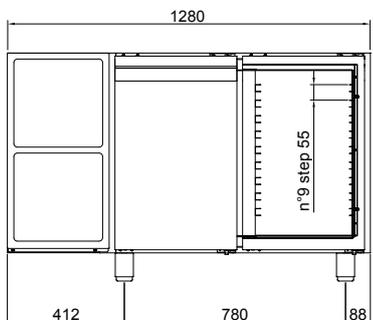

EN TECHNICAL SPECIFICATIONS

| Available temperature (°C) | Dimensions W x D x H (mm) | Packaging dimensions W x D x H (mm) | Refrigerant gas | Net volum (L) | Climate class | Energy class | Power consumption (W) | Supply voltage | Annual consumption (kWh/anno) |
|----------------------------|---------------------------|-------------------------------------|-----------------|---------------|---------------|--------------|-----------------------|-------------------|-------------------------------|
| 0 / +10 | 1280 x 600 x 860 | 1320 x 630 x 1100 | R290 | 151 | 5 | A | 350 | 220-240 V / 50 Hz | 328 |

EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated counter without worktop
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Motor inside the technical compartment
- Monobloc unit that is tropicalized and easily removable from the body, with forced ventilated refrigeration with R290 gas
- 60 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m³
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to climate class 5
- Automatic defrosting with compressor cut off in the 0/+10 °C version
- Automatic defrosting with electric resistance in the -2/+10 °C version
- Evaporation of condensation water by means of an anti-corrosion coil in AISI 316 low carbon
- Internal grid dimensions 430 x 325 mm
- Door hinges with automatic closing system
- Easily removable magnetic door and drawer gaskets
- Rounded internal corners and removable parts to facilitate cleaning
- Temperature detection by means of a thermistor sensor (NTC probe)
- Evaporator painted for cataphoresis with high corrosion resistance
- Height-adjustable stainless steel feet

V-2+10COU - cod. 06690280: -2/+10 °C working temperatur version

OPTIONAL

- Stainless steel grids 430 x 325 mm
- Polyethylene grids 430 x 325 mm
- Stainless steel couple of "U" runners
- Stainless steel couple of "L" runners
- Set of 4/6 castors
- Spare drawers' kit
(1/2+1/2 - 1/3+2/3 - 1/3+1/3+1/3)

