


mod. COU220BTPA | cod. 06665020

mod. COU220BTPRA | cod. 06665030

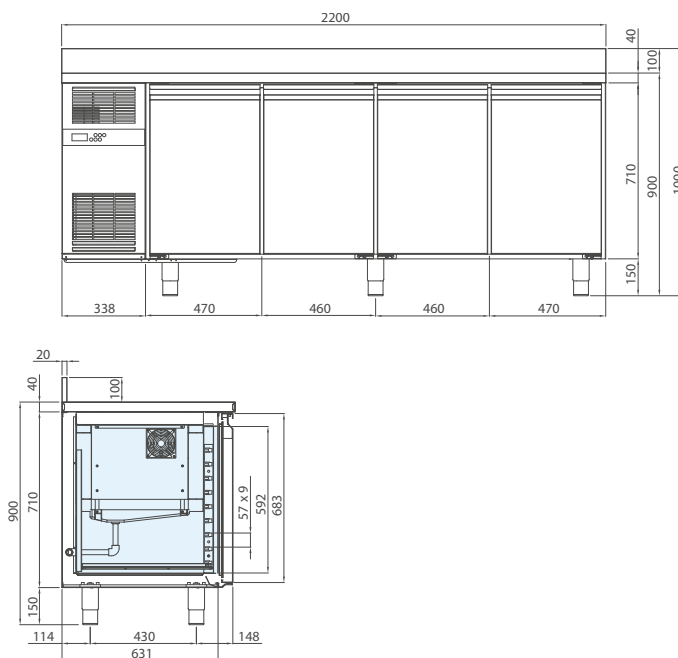

### EN TECHNICAL SPECIFICATIONS

Available temperature (°C)	Dimensions W x D x H (mm)	Packaging dimensions W x D x H (mm)	Refrigerant gas	Net volum (L)	Climate class	Energy class	Power consumption (W)	Supply voltage	Annual consumption (kWh/anno)
<b>-18 / -22</b>	2200 x 700 x 900	2300 x 750 x 1100	R290	384	5	E	750	220-240 V / 50 Hz	3760

### EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated counter with AISI 304 stainless steel worktop with splashback h 100 mm
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Motor inside the technical compartment
- Forced ventilated refrigeration with protected evaporators positioned between the compartments
- 60 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m<sup>3</sup>
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to climate class 5
- Automatic defrosting with electric resistance
- Automatic evaporation of condensate water by means of a copper heat exchanger
- Internal dimensions GN 1/1
- Door hinges with automatic closing system
- Easily removable magnetic door and drawer gaskets
- Rounded internal corners and removable parts to facilitate cleaning
- Temperature detection by means of a thermistor sensor (NTC probe)
- Evaporator painted for cataphoresis with high corrosion resistance
- Height-adjustable stainless steel feet

COU220BTPRA - cod. 06665030: version with round edge worktop

### OPTIONAL

- Stainless steel grids GN 1/1
- Polyethylene grids GN 1/1
- Stainless steel couple of "U" runners
- Set of 4/6 castors
- Lock with keys (for door and drawers)
- Sink above the unit
- Neutral drawer above the unit
- Spare drawers' kit  
(1/2 + 1/2 - 1/3 + 2/3 - 1/3 + 1/3 + 1/3)

