


mod. CAB700TNTN | cod. 06200150

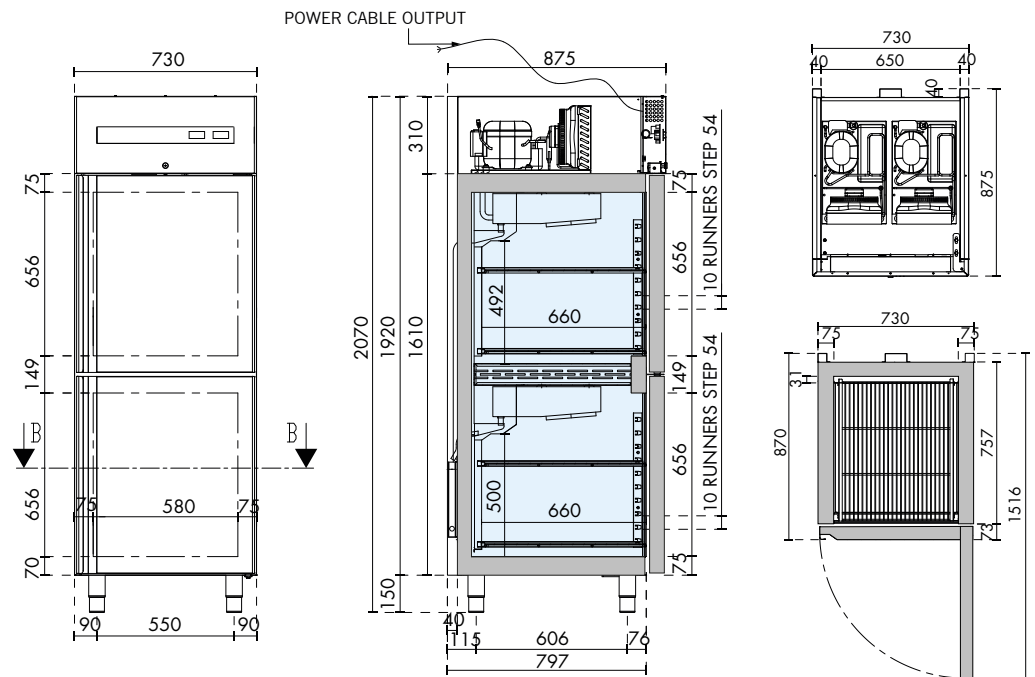

**EN TECHNICAL SPECIFICATIONS**

| Available temperature (°C) | Dimensions W x D x H (mm) | Packaging dimensions W x D x H (mm) | Refrigerant gas | Net volum (L) | Climate class | Energy class | Power consumption (W) | Supply voltage    | Annual consumption (kWh/year) |
|----------------------------|---------------------------|-------------------------------------|-----------------|---------------|---------------|--------------|-----------------------|-------------------|-------------------------------|
| -2 / +8<br>-2 / +8         | 730 x 875 x 2070          | 800 x 900 x 2300                    | R290            | 148<br>148    | 5             | D            | 200<br>200            | 220-240 V / 50 Hz | 803                           |

**EN TECHNICAL AND FUNCTIONAL FEATURES**

- Combo refrigerated cabinet with two separate compartments
- Forced ventilated refrigeration with R290 gas
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to climate class 5
- 75 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m<sup>3</sup>
- Temperature detection by means of a thermistor sensor (NTC probe)
- Operation control through a digital “touch” panel
- Automatic defrosting with a resistance
- Automatic evaporation of condensate water by means of a heat exchanger in copper
- Doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable magnetic gaskets
- U-shaped guides and adjustable and extractable racks for grids
- Rounded internal corners for quick and easy cleaning
- Evaporator painted for cataphoresis with high corrosion resistance
- 4 GN 2/1 polyethylene grids as standard
- Height-adjustable stainless steel feet
- Lock with key and light placed under the control panel

**OPTIONAL**

- Stainless steel couple of “U” runners
- Polyethylene grids GN 2/1
- Stainless steel grids GN 2/1
- Set of 4 castors

