


mod. CAB700-F | cod. 06200130

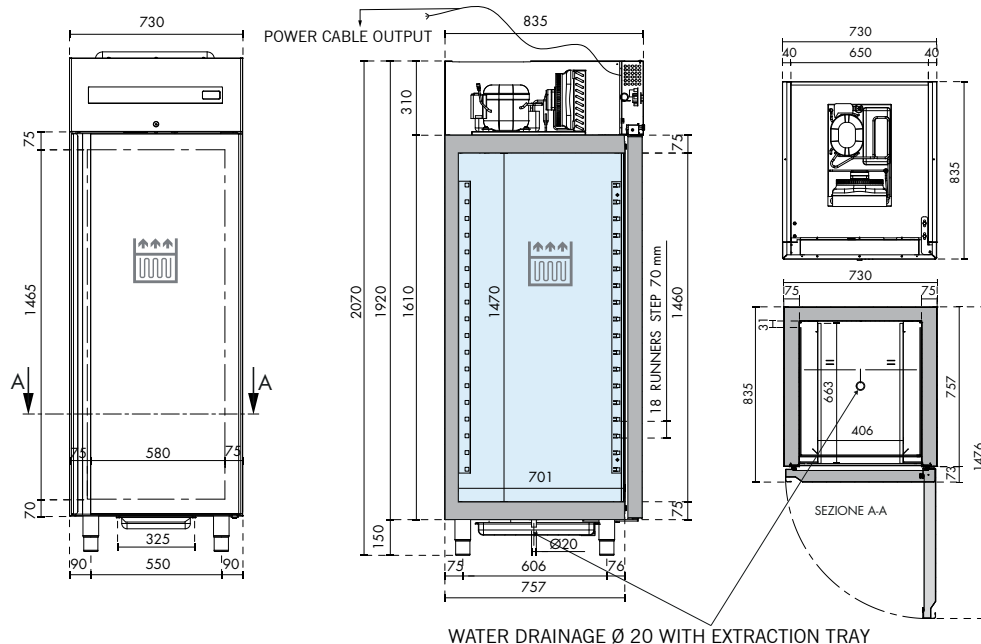

EN TECHNICAL SPECIFICATIONS

Available temperature (°C)	Dimensions & net weight W x D x H (mm) - kg	Packaging dimensions & weight W x D x H (mm) - kg	Refrigerant gas	Net volum (L)	Climate class	Power consumption (W)	Supply voltage
-5 / +8	730 x 835 x 2070 - 100kg	800 x 900 x 2300 - 122kg	R290	297	5	180	220-240 V / 50 Hz

EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated cabinet for fish storage
- Static refrigeration by means of a coil integrated in the rear and lateral insulation, operating with R290 gas
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to climate class 5
- 75 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m³
- Temperature detection by means of a thermistor sensor (NTC probe)
- Operation control through a digital "touch" panel
- Automatic defrosting when the compressor stops
- Tray to collect condensation water drained via a central hole with external siphon
- Reversible opening doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable magnetic gaskets
- Rounded internal corners for quick and easy cleaning
- Evaporator painted for cataphoresis with high corrosion resistance
- 6 pairs of L-shaped stainless steel guides for 600 x 400 mm shelves as standard
- Height-adjustable stainless steel feet
- Lock with key and light placed under the control panel

OPTIONAL

- 600 x 400 x h 130 polyethylene tray
- 600 x 400 x h 70 polyethylene tray
- Stainless steel grids 600 x 400 mm
- Couple "L" runners for grids 600 x 400 mm
- Led light
- Set of 4 castors