


mod. CAB700PRBT | cod. 06203010

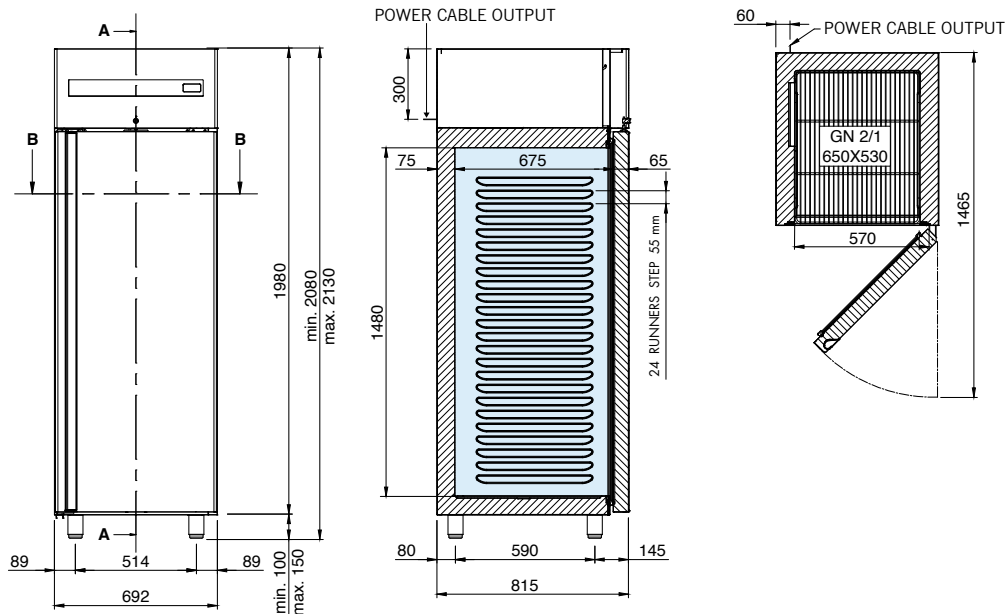

## EN TECHNICAL SPECIFICATIONS

| Available temperature (°C) | Dimensions & net weight<br>W x D x H (mm) - kg | Packaging dimensions & weight<br>W x D x H (mm) - kg | Refrigerant gas | Net volum (L) | Climate class | Energy class | Power consumption (W) | Supply voltage    | Annual consumption (kWh/year) |
|----------------------------|------------------------------------------------|------------------------------------------------------|-----------------|---------------|---------------|--------------|-----------------------|-------------------|-------------------------------|
| -18 / -22                  | 692 x 815 x 2085 - 120kg                       | 760 x 860 x 2240 - 134kg                             | R290            | 464           | 5             | C            | 530                   | 220-240 V / 50 Hz | 1786                          |

## EN TECHNICAL AND FUNCTIONAL FEATURES

- Refrigerated cabinet with moulded guides
- Monobloc unit that is tropicalized and easily removable from the body, with forced ventilated refrigeration with R290 gas
- Structure entirely in AISI 304 stainless steel
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to climate class 5
- 80 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m<sup>3</sup>
- Temperature detection by means of a thermistor sensor (NTC probe)
- Operation control through a digital "touch" panel
- Automatic defrosting by hot gas
- Evaporation of condensation water by means of an anti-corrosion coil in AISI 316 low carbon
- Reversible opening doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable seven-chamber magnetic gaskets
- Rounded internal corners for quick and easy cleaning
- Evaporator painted for cataphoresis with high corrosion resistance
- 3 GN 2/1 polyethylene grids as standard
- Height-adjustable stainless steel feet
- Lock with key and light placed under the control panel
- Internal air ducting on the left side
- Water drain via a hole in the bottom

## OPTIONAL

- Polyethylene grids GN 2/1
- Stainless steel grids GN 2/1
- Set of 4 castors
- Door opening pedal

