


mod. CAB1400TNBT | cod. 06220070

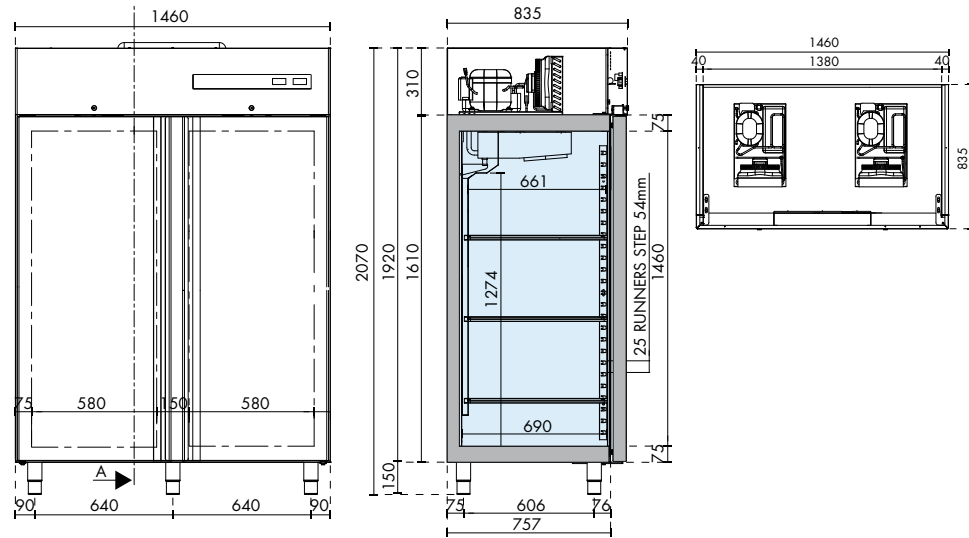

EN TECHNICAL SPECIFICATIONS

Available temperature (°C)	Dimensions & net weight W x D x H (mm) - kg	Packaging dimensions & weight W x D x H (mm) - kg	Refrigerant gas	Net volum (L)	Climate class	Power consumption (W)	Supply voltage	Annual consumption (kWh/year)
-2 / +8 ❄️ -18 / -22	1460 x 875 x 2070 -236kg	1500 x 900 x 2300 -265kg	R290	465 ❄️ 465	5	180 ❄️ 365	220-240 V / 50 Hz	2519

EN TECHNICAL AND FUNCTIONAL FEATURES

- Combo refrigerated cabinet with two separate compartments
- Left compartment -2/+8°C and right compartment -18/-22°C
- Two monoblocks units that is tropicalized and easily removable from the body, with forced ventilated refrigeration with R290 gas
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Tested with external working environment temperatures up to 43 °C, efficiency equivalent to climate class 5
- 75 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m³
- Temperature detection by means of a thermistor sensor (NTC probe)
- Operation control through a digital "touch" panel
- Automatic defrosting by hot gas
- Automatic evaporation of condensate water by means of a heat exchanger in copper
- Doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable magnetic gaskets
- U-shaped guides and adjustable and extractable racks for grids
- Rounded internal corners for quick and easy cleaning
- Evaporator painted for cataphoresis with high corrosion resistance
- 6 GN 2/1 polyethylene grids as standard
- Height-adjustable stainless steel feet
- Lock with key and light placed under the control panel

OPTIONAL

- Stainless steel couple of "U" runners
- Polyethylene grids GN 2/1
- Stainless steel grids GN 2/1
- Set of 4 castors