


mod. RPC1000 | cod. 06270010

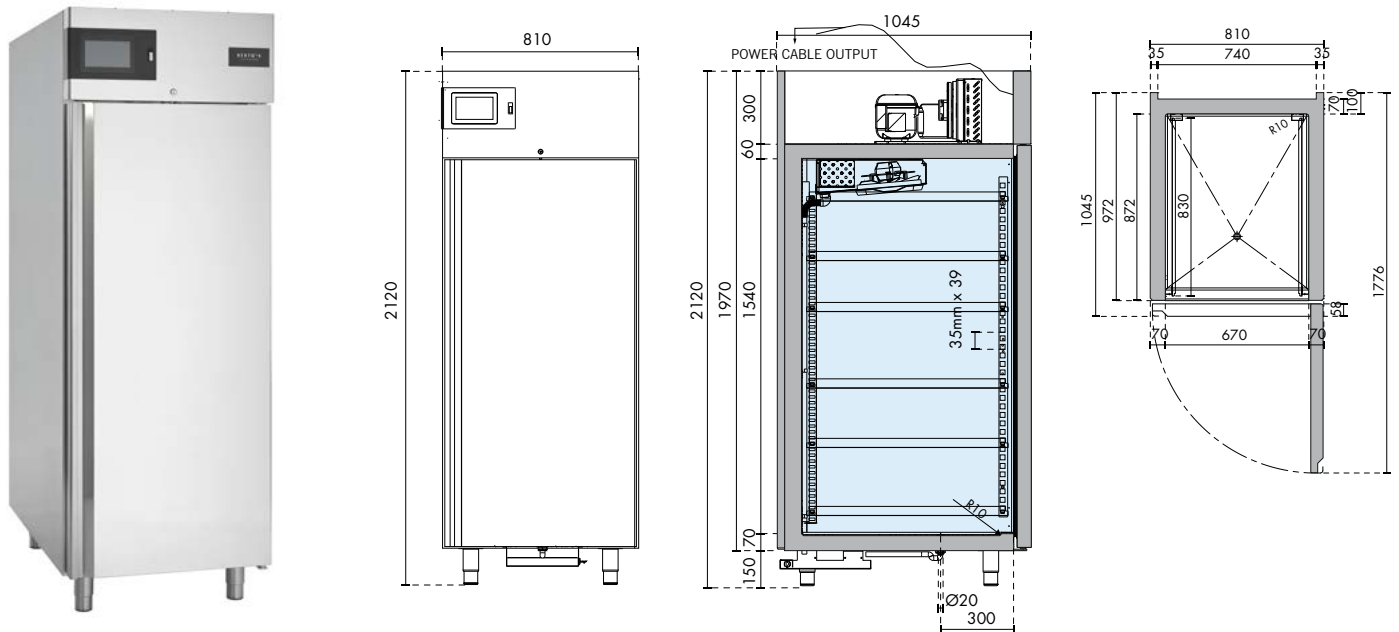

EN TECHNICAL SPECIFICATIONS

Available temperature (°C)	Dimensions & net weight W x D x H (mm) - kg	Packaging dimensions & weight W x D x H (mm) - kg	Refrigerant gas	Net volum (L)	Climate class	Power consumption (W)	Supply voltage
-6 / +40	810 x 1045 x 2120 - 190kg	910 x 1150 x 2300 - 240kg	R290	576	5	1800	220-240 V / 50 Hz

EN TECHNICAL AND FUNCTIONAL FEATURES

- **Retarder prover**
- Forced ventilated refrigeration with R290 gas
- Structure entirely in steel. Interior, walls and door in AISI 304 stainless steel
- Tested with external working environment temperatures up to 43°C, efficiency equivalent to climate class 5
- 70 mm insulation of high pressure injected HFO polyurethane with a density of 42 kg/m³
- Temperature detection by means of a thermistor sensor (NTC probe)
- Humidity detection by means of a probe
- 7" Touch Display control panel
- Temperature, humidity and fan adjustment (10 different speeds)
- Automatic defrosting by hot gas
- Automatic evaporation of condensation water by means of resistance
- Reversible opening doors with automatic closing and a fixed opening position of 100°
- Hinges with automatic closing system
- Easily removable magnetic gaskets
- Rounded internal corners for quick and easy cleaning
- Stainless steel evaporator with high corrosion resistance
- 18 pairs of L-shaped stainless steel guides for 600 x 800 mm shelves as standard
- Height-adjustable stainless steel feet
- Lock with key and light placed under the control panel

OPTIONAL

- Aluminized steel tray 600 x 400 x h 20
- Aluminized steel tray 600 x 400 x h 30
- Aluminized steel tray 600 x 400 x h 40
- Aluminized steel tray 600 x 400 x h 50
- Couple "L" runners for grid 600 x 800 mm